




WiDMX for iPhone/iPad/Android/PC

GB

USER'S MANUAL

DESCRIPTION OF THE PANELS

GB

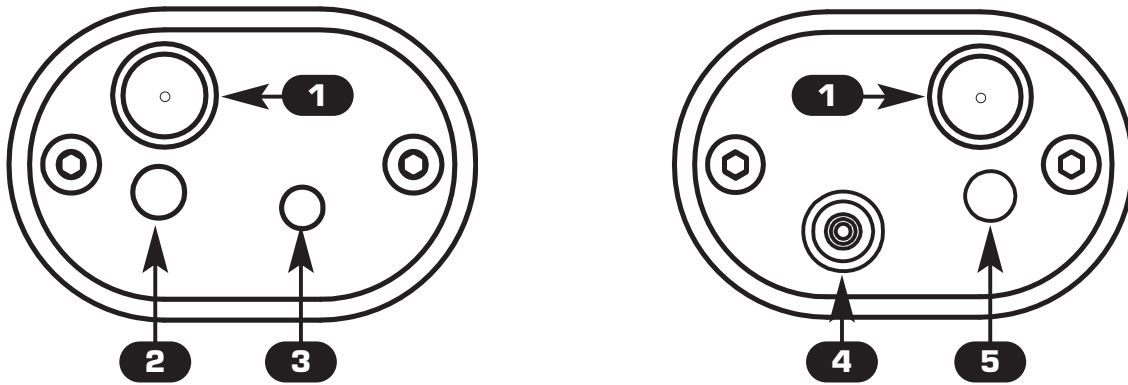


- 1** SMA antenna connector
- 2** Blue led :
Slow blinking: Transmitter **OK**, no **DMX 512** signal.
Switched on : Transmitter **OK**, **DMX 512** signal **OK**..
- 3** Red Button for change channel and pairing operation
- 4** Power input 5 Vdc 600 mA (AC adapter included)
- 5** Red/Green led :
Blinking Red: Artnet not present
Green led switched on: Artnet packet received
Blinking Green: Wait for next Artnet packet

RECEIVER PAIRING

GB

- 1** Power up Wi D Pen PRO receiver
- 2** Hold the button until the Wi D Pen Pro led starts blinking r-g-b alternately
- 3** Remove power supply from WiDMXbyPhone
- 4** Holding the red button, connect power supply and wait until the WiDMXbyPhone led starts fast blinking
- 5** When the led stops fast blinking, the Wi D Pen Pro receiver is paired

RECEIVER

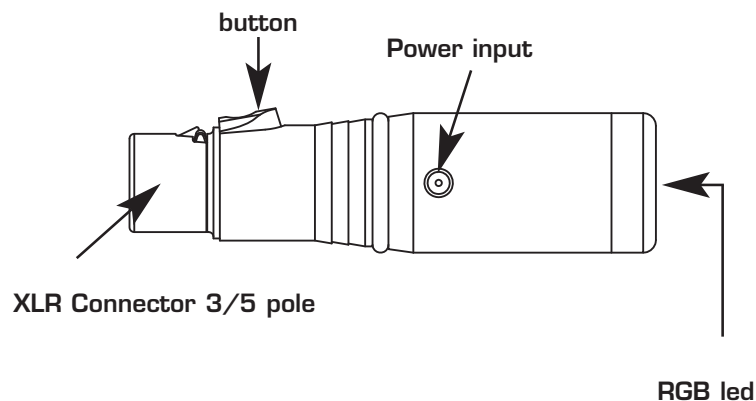

DOWNLOAD AN APPLICATION

GB

- **Android** on Google Play “**Art-Net Controller LITE litux**”

https://play.google.com/store/apps/details?id=com.litux.art_net_controller_lite&hl=it

THIS IS A TRIAL VERSION WITH SAME FEATURES OF FULL VERSION BUT WITH ONLY 24 ACTIVE CHANNELS

- **Settings NET -> Broadcasting to: 2.255.255.255**

- **iPhone/iPad**

www.alcorn.com/products/lightingpad


www.synthe-fx.com/products/luminairipad

- **Settings NET -> Broadcasting to: 2.255.255.255**

- **PC**

<http://users.telenet.be/freestyledmx/>

- To setup FreeStyler follow the 4 steps in figure, clic to save then close the program and reopen it

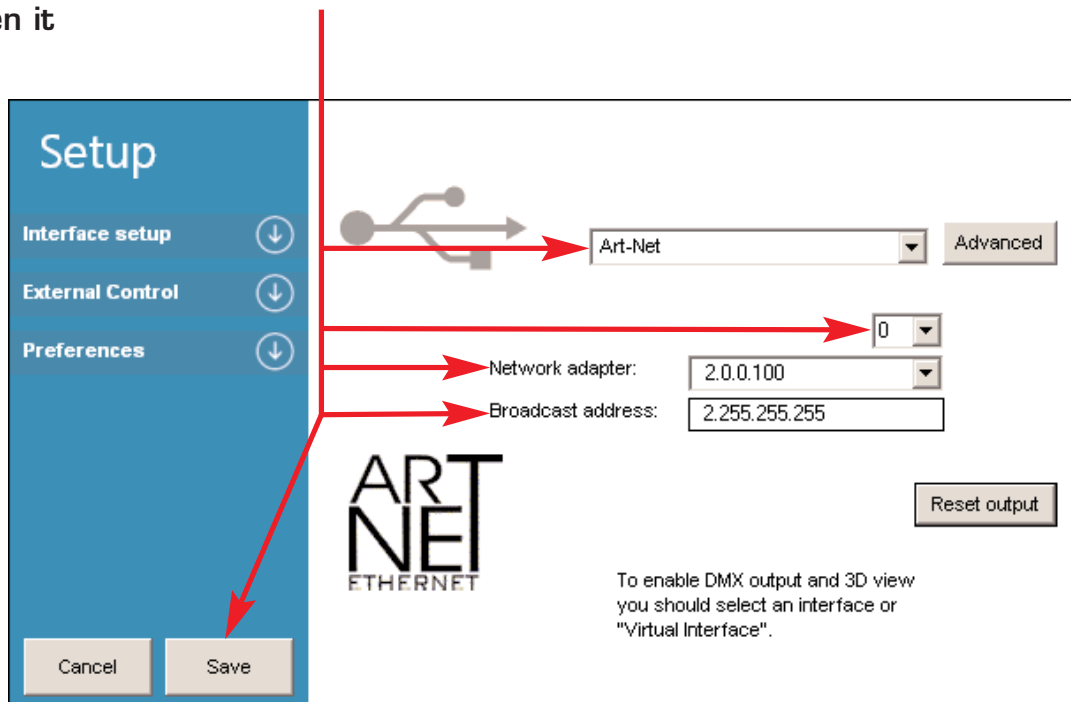

It is advisable to activate the output refresh “continuous broadcasting” or “FPS” option in the app settings, where available.

WIFI CONNECTION

GB

- 1) Check with your device wireless networks available
- 2) Select the SSID “WiDMXbyPhone_XXX” (the exact name is indicated in the label under the product)
- 3) Enter the WPA/WPA2 PSK 10 characters password “widmxXXXXXX” located under the product and click connect



Always connect the provided power supply



In the event of radio problem, press the red button until blue led does a fast blinking (a new radio channel is set)

Technical features WiDMX transmitter:

Frequency range: 2,4 GHz - 2,483 GHz (ISM)

Number of channels: 20

Transmitter range: 500 meters/1640 feet open air

Technical features WiDMXbyPhone:

Voltage/current: 5 Vdc / 600 mA

Dimensions and weight:

Dimension (W x L x H) / Weight: 124 x 45 x 30 mm / 100 g



*Art-Net™ Designed
by and Copyright
Artistic Licence
Holdings Ltd.*



FCC ID: UP2AWA24S

FCC ID: YOPGS1011MEE

Canadian Cert No IC: 6797A-AWA24S

Canadian Cert No IC: 9154A-GS1011MEE



CODEM MUSIC S.r.l. - Via G.Pierini, 13 - 61122 PESARO - ITALY

Tel. +39 0721 204357 - Fax +39 0721 203554

<http://www.wi-dmx.com> - E-mail: info@codemmusic.com



All rights reserved. No parts of this document can be copied, photocopied or reproduced without the prior written permission of **CODEM MUSIC s.r.l.**

No responsibility is taken for possible inaccuracies or mistakes.

CODEM MUSIC s.r.l. reserves the right to make any alterations or aesthetics changes of this product that seem necessary at any time and for whatever reason.

CODEM MUSIC s.r.l. takes no responsibility for the use or for the application of this product.